


40kw Fisher Light タングステン




FISHER LIGHTS™

F値 データ

高さ	ISO	ISO100		ISO200		ISO100		ISO200		横河		CL-200								
		1/30	1/60	1/30	1/60	30 f/s	60 f/s	30 f/s	60 f/s	ケルビン	lux	ケルビン	lux							
1m	4.0	5/10	2.8	5/10	5.6	4/10	4.0	5/10	2.8	1/10	2.0	1/10	4.0	1/10	2.8	1/10	2,879	2,027	2,879	2,135
2m	2.8	9/10	2.0	8/10	4.8	8/10	2.8	8/10	2.8	2.8	1.4	9/10	2.8	9/10	2.8	2.8	2,875	1,359	2,875	1,333
3m	2.8	3/10	2.0	3/10	4.0	3/10	2.8	3/10	2.0	4/10	1.4	4/10	2.8	4/10	2.0	4/10	2,870	1,023	2,870	1,028
4m	2.0	8/10	1.4	8/10	2.8	8/10	2.0	8/10	1.4	9/10	1.0	9/10	2.0	9/10	1.4	9/10	2,879	770.6	2,879	769.1
4.8m	1.4	7/10	1.0	7/10	2.0	7/10	1.4	7/10	1.4	7/10	1.0	7/10	2.0	7/10	1.4	7/10	2,876	609.6	2,876	604.4

調光値 データ

機種 %	横河			MINOLTA III-F			KONICA MINOLTA CL-200		
	ケルビン	duv	lux	ケルビン	LB	CC	ケルビン	LB	CC
100 %	3,322	.0094	2,135	2,790	-46	0	2,879	+0025	2,027
79 %	3,311	.0092	2,119	2,790	-47	0	2,872	+0024	2,042
63 %	3,295	.0091	2,028	2,770	-48	0	2,861	+0025	1,971
50 %	3,243	.0089	1,686	2,720	-55	0	2,806	+0025	1,664
40 %	3,158	.0085	1,222	2,630	-68	0	2,718	+0028	1,212
31 %	3,070	.0077	956	2,560	-78	0	2,650	+0030	933.0
25 %	2,952	.0071	564	2,440	-98	1G	2,517	+0036	552.0
20 %	2,821	.0058	313.3	2,310	-120	1G	2,390	+0043	308.0
16 %	2,693	-.0044	157.0	2,180	-146	2G	-	-	153.4
12 %	2,149	-.0059	74.1	2,060	-173	3G	-	-	70.0
10 %	2,102	-.0063	37.8	-	-	-	-	-	34.8
8 %	2,079	-.0076	20.67	-	-	-	-	-	18.9
6 %	2,048	-.0093	12.89	-	-	-	-	-	11.4
5 %	2,039	-.0108	8.98	-	-	-	-	-	7.0
4 %	2,055	-.0122	5.93	-	-	-	-	-	5.0
3 %	2,055	-.0131	5.02	-	-	-	-	-	4.2
0 %	-	-	-	-	-	-	-	-	-

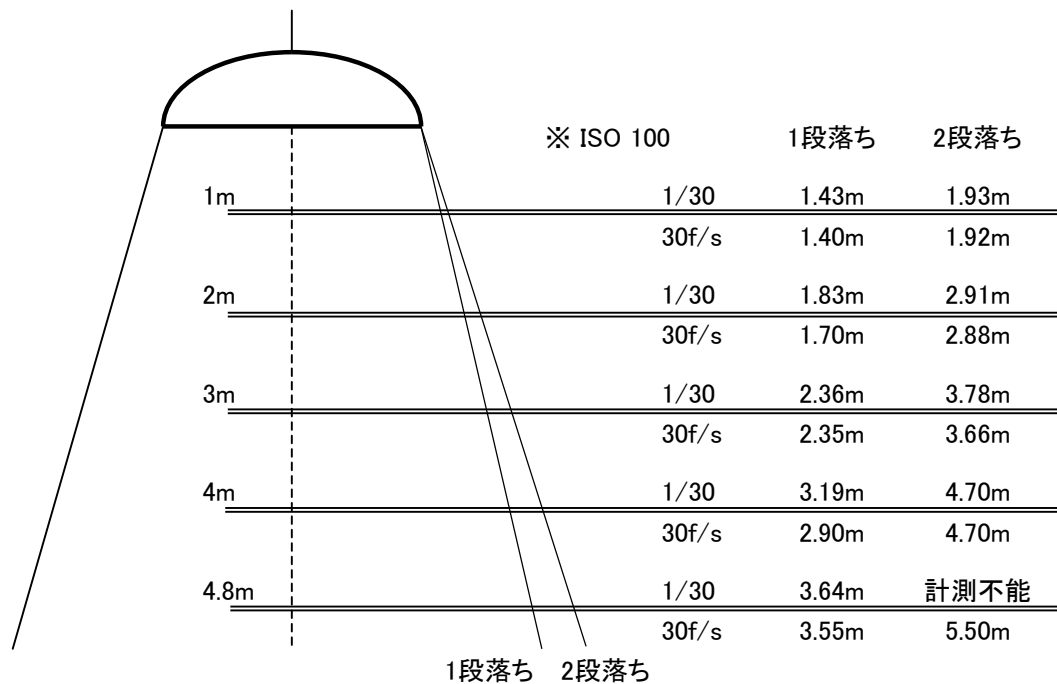

※計測状況 高さ 1m ライトの中心で計測
 ※2009.1.14現在