


# 80kw Fisher Light タングステン




FISHER LIGHTS™

## F値 データ

ISO 高さ	ISO100	ISO100	ISO200	ISO200	ISO100	ISO100	ISO200	ISO200	横河		CL-200	
	1/30	1/60	1/30	1/60	30 f/s	60 f/s	30 f/s	60 f/s	ケルビン	lux	ケルビン	lux
1m	8.0	5.6	11.0	8.0	5.6	4.0	8.0	5.6	3,351	5,758	2,947	5,849
2m	5.6 2/3	4.0 2/3	8.0 2/3	5.6 2/3	4.0 2/3	2.8 2/3	5.6 2/3	4.0 2/3	3,376	4,242	2,940	4,486
3m	5.6 1/3	4.0 1/3	8.0 1/3	5.6 1/3	4.0 1/3	2.8 1/3	5.6 1/3	4.0 1/3	3,380	3,226	2,949	3,400
4m	5.6	4.0	8.0	5.6	4.0	2.8	5.6	4.0	3,387	2,502	2,947	2,598
4.8m	4.0 1/2	2.8 1/2	5.6 1/2	4.0 1/2	2.8 1/2	2.0 1/2	4.0 1/2	2.8 1/2	3,376	2,044	2,942	2,003

## 調光値 データ

機種 %	横河			MINOLTA III-F			KONICA MINOLTA CL-200		
	ケルビン	duv	lux	ケルビン	LB	CC	ケルビン	LB	CC
100 %	3,351	.0093	5,758	2,850	-39	0	2,930	+0023	5,237
79 %	3,351	.0093	5,618	2,850	-39	0	2,925	+0022	4,929
63 %	3,347	.0094	5,510	2,840	-40	0	2,913	+0022	4,858
50 %	3,291	.0092	4,625	2,780	-47	0	2,858	+0024	4,031
40 %	3,183	.0085	3,286	2,680	-60	0	2,764	+0026	2,755
31 %	3,120	.0082	2,611	2,620	-69	0	2,701	+0028	2,208
25 %	2,985	.0072	1,553	2,490	-90	0	2,569	+0033	1,315
20 %	2,842	.0059	854.0	2,360	-112	1G	2,433	+0040	739.5
16 %	2,712	.0046	433.0	2,220	-138	1G	2,304	+0051	374.9
12 %	2,602	.0029	207.4	2,090	-166	3G	-	-	178.5
10 %	2,513	.0010	101.0	1,990	-190	4G	-	-	88.6
8 %	2,081	-.0072	55.24	-	-	-	-	-	47.9
6 %	2,073	-.0086	32.91	-	-	-	-	-	29.7
5 %	2,080	-.0097	22.84	-	-	-	-	-	19.9
4 %	2,094	-.0105	17.33	-	-	-	-	-	14.9
3 %	2,126	-.0113	13.45	-	-	-	-	-	10.6
0 %	-	-	-	-	-	-	-	-	-

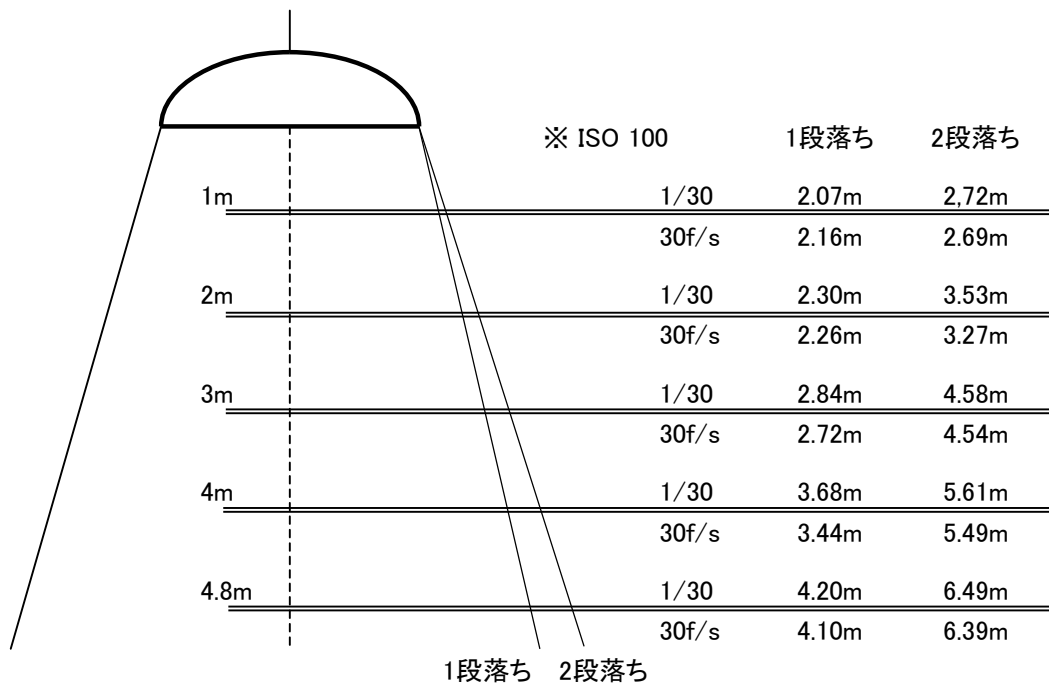

※計測状況 高さ 1m ライトの中心で計測  
 ※2009.1.14現在